


Floating chucks COMPACT & SUPER COMPACT Series

Non-adjustable angular correction

Technical features

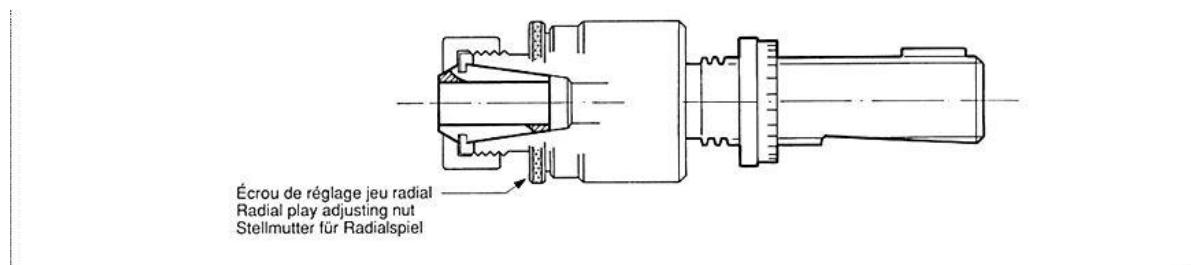

Adjustable radial clearance:

0 to 2 mm depending on the model

Adjustable angular correction:

1 degree, non-adjustable.


Floating chucks in the "Compact" series (with a serial number beginning with a "C") or "Super Compact" series ("SC") have a reduced space requirement

They are mainly used in transfer machines as well as in multispindle heads.

These chucks are not equipped with an adjustable angular correction.

Some COMPACT:SUPER COMPACT floating chucks can be equipped with a centering spring.

Details

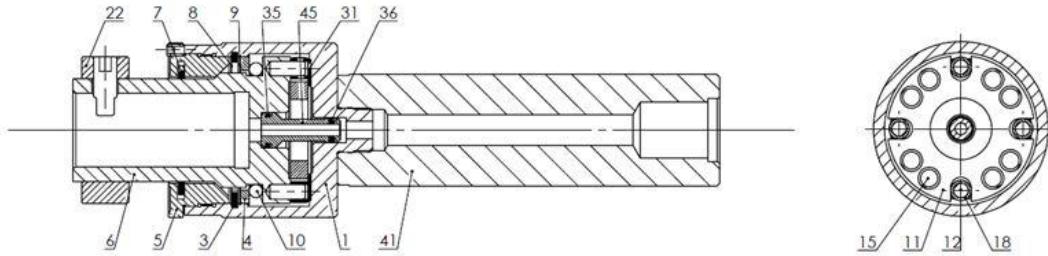

- 1 Body
- 3 Circlips
- 4 Stop plate
- 5 Centering nut
- 6 Tool-holder sleeve
- 7 Gasket
- 8 Spring washer
- 9 Spring washer
- 10 Ball
- 11 Oldham coupling
- 12 Axis
- 15 Ball
- 18 Roller
- 22 Clamping ring
- 31 Wear washer
- 35 Gasket
- 36 Gasket
- 41 Shank
- 45 Nozzle